


CBNCF756

CRIMP FEMALE BNC FOR KX6 AND RG 59



FT 120/05/2011 MC

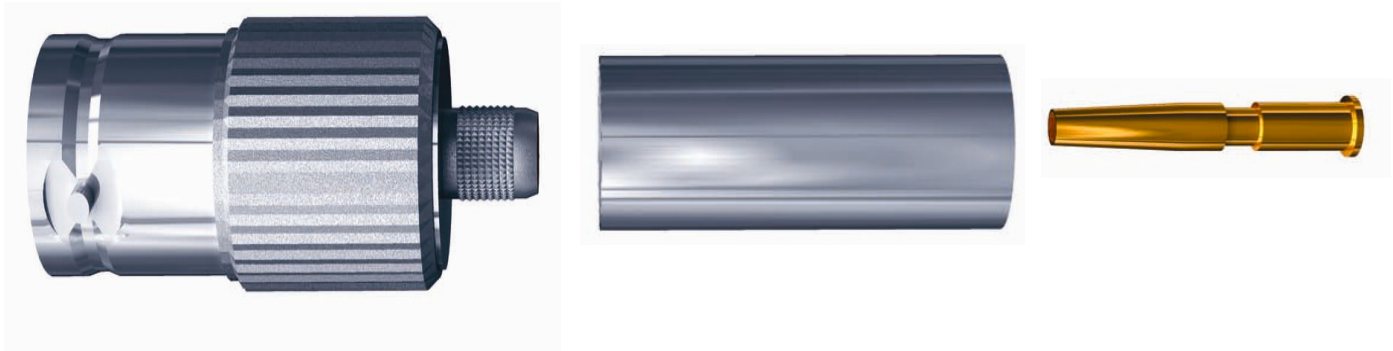

MECHANICAL FEATURES

Contact central	MATERIAL	FINISH
Insulator	Copper	Or
Body	POM	
Ferrule	Copper	Nickel
	Copper	Nickel
Impedance	75 Ω	
Crimping tool	PBNCS	
	Central contact crimping Ø: 0.68 mm	
	Ferrule crimping Ø: 0.256 mm	
Sleeves:	M75Bx - available in different colors	
Cables:	KX6 - RG59	

DIMENSIONAL FEATURES

