

CPLUG


Flat cable black or ivory



Conductor:
Red multi-strand copper
AWG28/7 S: 0.089mm²

Isolation:
Polyolefin
0.96mm

Outer sheath:
PVC noir ou ivoire

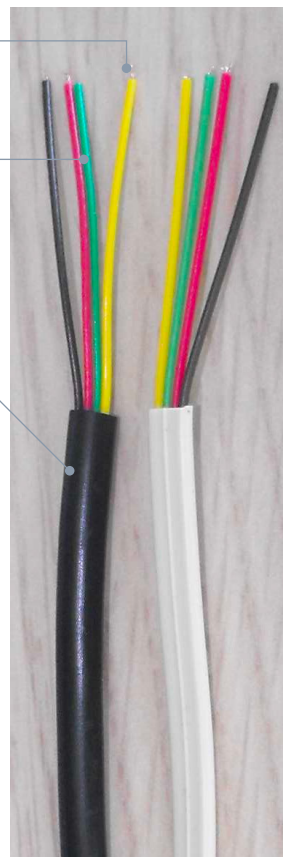

PRODUCT INFORMATION

APPLICATION

These cables are intended, for example, for connecting telephone exchanges, phones, and alarm peripherals.


ELECTRICAL PROPERTIES

Service voltage: 150Vac

FEATURES



Fire resistance
IEC 60332-1 ou NF C 32-070 Cat C2



Curvature radius:
10 x H



Service temperature:
-10°C to +70°C



Compliant with RoHS directive.

Ref	Dimensions: LxH		Weight (Kg/Km)	Color code of conductors
CPLUG 4 N/I	4.90	2.40	17	Black, Red, Green, Yellow
CPLUG 6 N/I	6.90	2.40	26	White, Black, Red, Green, Yellow, Blue
CPLUG 8 N/I	8.70	2.40	35	Gray, Orange, Black, Red, Green, Yellow, Blue, Brown