


H05/07V-K

Harmonized wiring cables, intended for household circuitry.
to wiring of electrical panels and devices.



Conductor:
Red copper
Grade 5 according to:
IEC 60228

Isolation:
PVC type T11
Color: blue, brown, white, gray, brown, black, orange,
red, purple, green/yellow

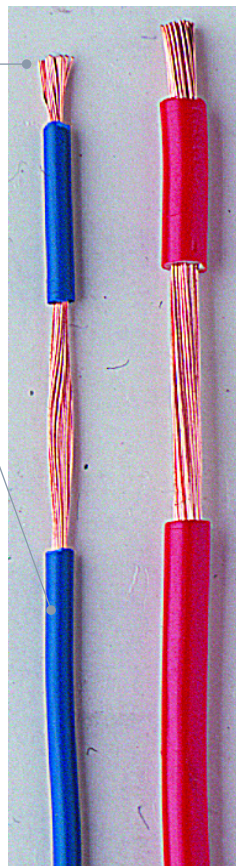

FT 4 06/06/2017 EN

PRODUCT INFORMATION

APPLICATION

The harmonized cables H05/07V-K are equipped with a flexible PVC sheath for fixed installation.

ELECTRICAL PROPERTIES

Rated voltage U^0/U :

- H05	300 / 500V
- H07	450 / 750V

Test voltage:

- H05	2000V
- H07	2500V

FEATURES



Fire resistance:
EN 60332-1
EN 50575 :2014 + A1 :2016 Eca



Service temperature:
- 5°C → +70°C



Minimum radius of curvature:

H05	4 x Ø
H07	6 x Ø



In compliance with the RoHS directive.

Reference standards
EN 50525-2-31

PRODUCT REFERENCES			
			
H05V-K			
VK050	0,50	2,1 / 2,5	7,5
VK075	0,75	2,2 / 2,7	10
VK1	1	2,4 / 2,8	15
H07V-K			
VK15	1,50	2,8 / 3,4	22
VK25	2,50	3,4 / 4,1	30
VK4	4	3,9 / 4,8	66
VK6	6	4,4 / 5,3	112
VK10	10	5,7 / 6,8	172
VK16	16	6,7 / 8,1	268
VK25MM	25	8,4 / 10,2	363
VK35	35	9,7 / 11,7	510
VK50	50	11,5 / 13,9	700
VK70	70	13,2 / 16,0	960
VK95	95	15,1 / 18,2	1295
VK120	120	16,7 / 20,2	1590
VK150	150	18,6 / 22,5	2085
VK185	185	20,6 / 24,9	2450
VK250	240	23,5 / 28,4	3160