



El conmutador Ethernet Gigabit LevelOne GEU-0822 está diseñado para una red de alto rendimiento confiable. Con su estructura de conmutación sin bloqueo en modo full-duplex, este conmutador puede proporcionar hasta 2000 Mbps por puerto, mientras que el servicio Store-and-Forward garantiza baja latencia y entrega de paquetes sin errores. Este conmutador Ethernet Gigabit de alto rendimiento es perfecto para satisfacer las demandas de los juegos en línea y la transmisión multimedia. Además, este conmutador también es compatible con el estándar IEEE 802.3az Ethernet Eficiente en Energía, que ayuda a reducir el consumo de energía.

PRODUCT INFORMATION

AHORRO DE ENERGÍA

The GEU-0822 supports IEEE 802.3az Energy Efficient Ethernet to provide power-saving benefits without compromising performance. One way is to automatically detect the length of connected cables and adjust power usage by saving energy on shorter cable connections.

COMPACT AND STYLISH DESIGN

The stylish, compact wall-mountable housing of GEU-0822 fits any working environment. It comes with 8 × 10/100/1000Mbps ports to meet SOHO and home network expansion needs.

EASY TO USE

The GEU-0822 offers plug-and-play functionality for effortless installation. Configuration is not necessary. Autonegotiation on each port detects the network device's link speed and adjusts for compatibility and best performance.

MAIN FEATURES

- 8 ports Ethernet gigabit
- Vitesse filaire de transmission et de réception des données de 10/100/1000 Mbit/s
- Extended 9K frames for optimal data transfer rate
- Support for auto-learning and aging of 4K MAC addresses
- Desk or wall mounting
- Reduction of carbon footprint thanks to advanced eco-energy technology (IEEE 802.3az)

CHARACTERISTICS

SYSTEM CHARACTERISTICS

Standards	IEEE802.3(10BASE-T) IEEE802.3u(100BASE-T) IEEE802.3ab(1000BASE-T) IEEE802.3az Energy Efficient Ethernet
Memory	16kbit
Buffer Memory	1.5Mbit
Puerto	8 × 10/100Base-T RJ-45 Port
Indicator	Power LINK/ACT 1000M
Transmission method	Store- forward
Power input	DC 5V/1A

Back panel (Gbps)	16Gbps
MAC address table	4K
Energy saving	Oui
Operating temperature (°C)	0~40°C
Operating humidity	10%~90%
Storage temperature (° C)	-40°C - 70°C
Storage humidity (without condensation)	5%~90%

FEATURES

General	8 × 10/100/1000Mbps
---------	---------------------


PERFORMANCES

Packet transfer rate	1488000pps
Extended frame (K)	9216KByte

PHYSICAL SPECIFICATIONS

Dimensions (L x W x H mm)	140*78*28 mm
Weight (g)	520g

WIRING DIAGRAM

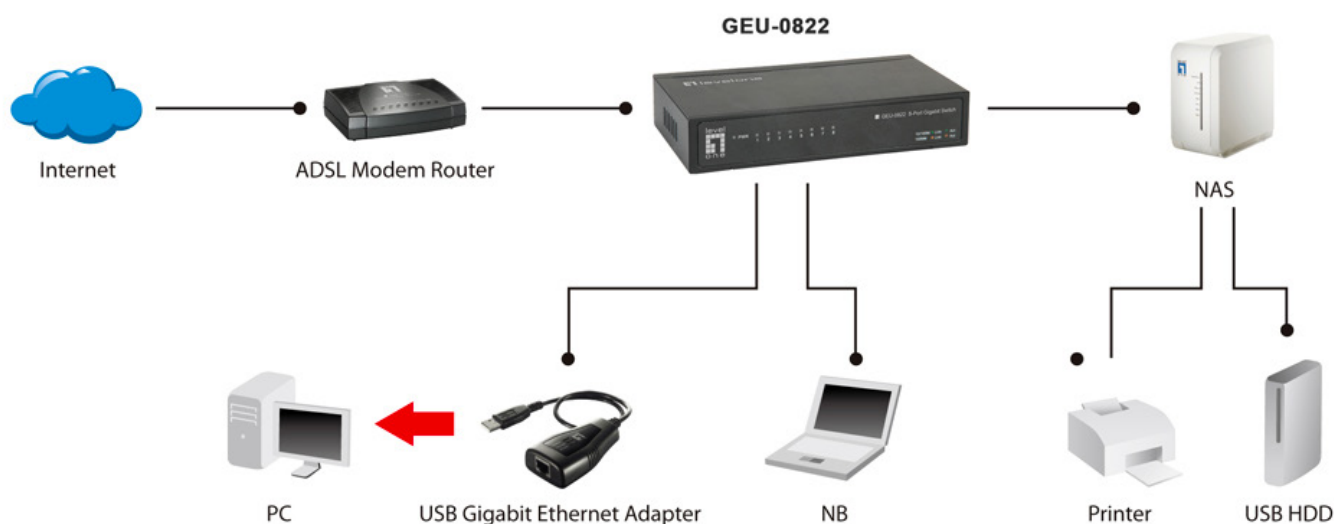

Order information

GEU-0822

Contents of the packaging

GEU-0822
Power Adapter Quick Installation Guide