

SYS120RG

SYS 1 RED Telephone Cable




Conductor:
Single-strand red copper
AWG20

Isolation:
Polyethylene
Color code: White / Red

Tear thread

Outer sheath:
PVC
Red
Ø nom. : 4.0 mm

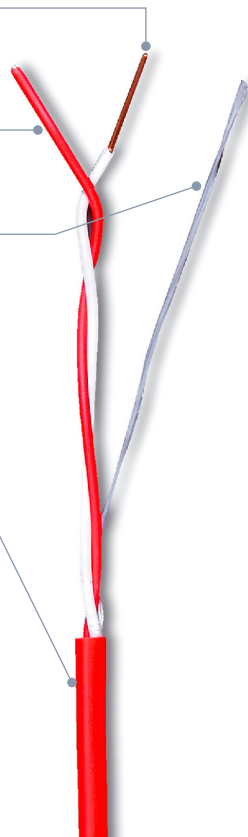

FT 3 13/06/2017 EN

PRODUCT INFORMATION

APPLICATION

SYS RED cables for alarm transmission and for connections between smoke detectors and the control panel.

FEATURES



Fire resistance:
IEC 60332-1
EN 50575 :2014 + A1 :2016 Eca



Service temperature:
- 10°C → + 70°C



Compliant with the RoHS directive

DESCRIPTION OF THE CABLE

Assemblage: in pairs

Tag:
ID CABLES - D.I. - 1x2xAWG20 + Lot number + Metric marking

ELECTRICAL PROPERTIES

Maximum tension:	180 Vac
Impedance (1 MHz):	100 Ω ± 20
Capacité cond/cond :	< 70 nF/km
Maximum linear resistance:	40.5 Ω/km